



Safety is a Part
of Your Contract

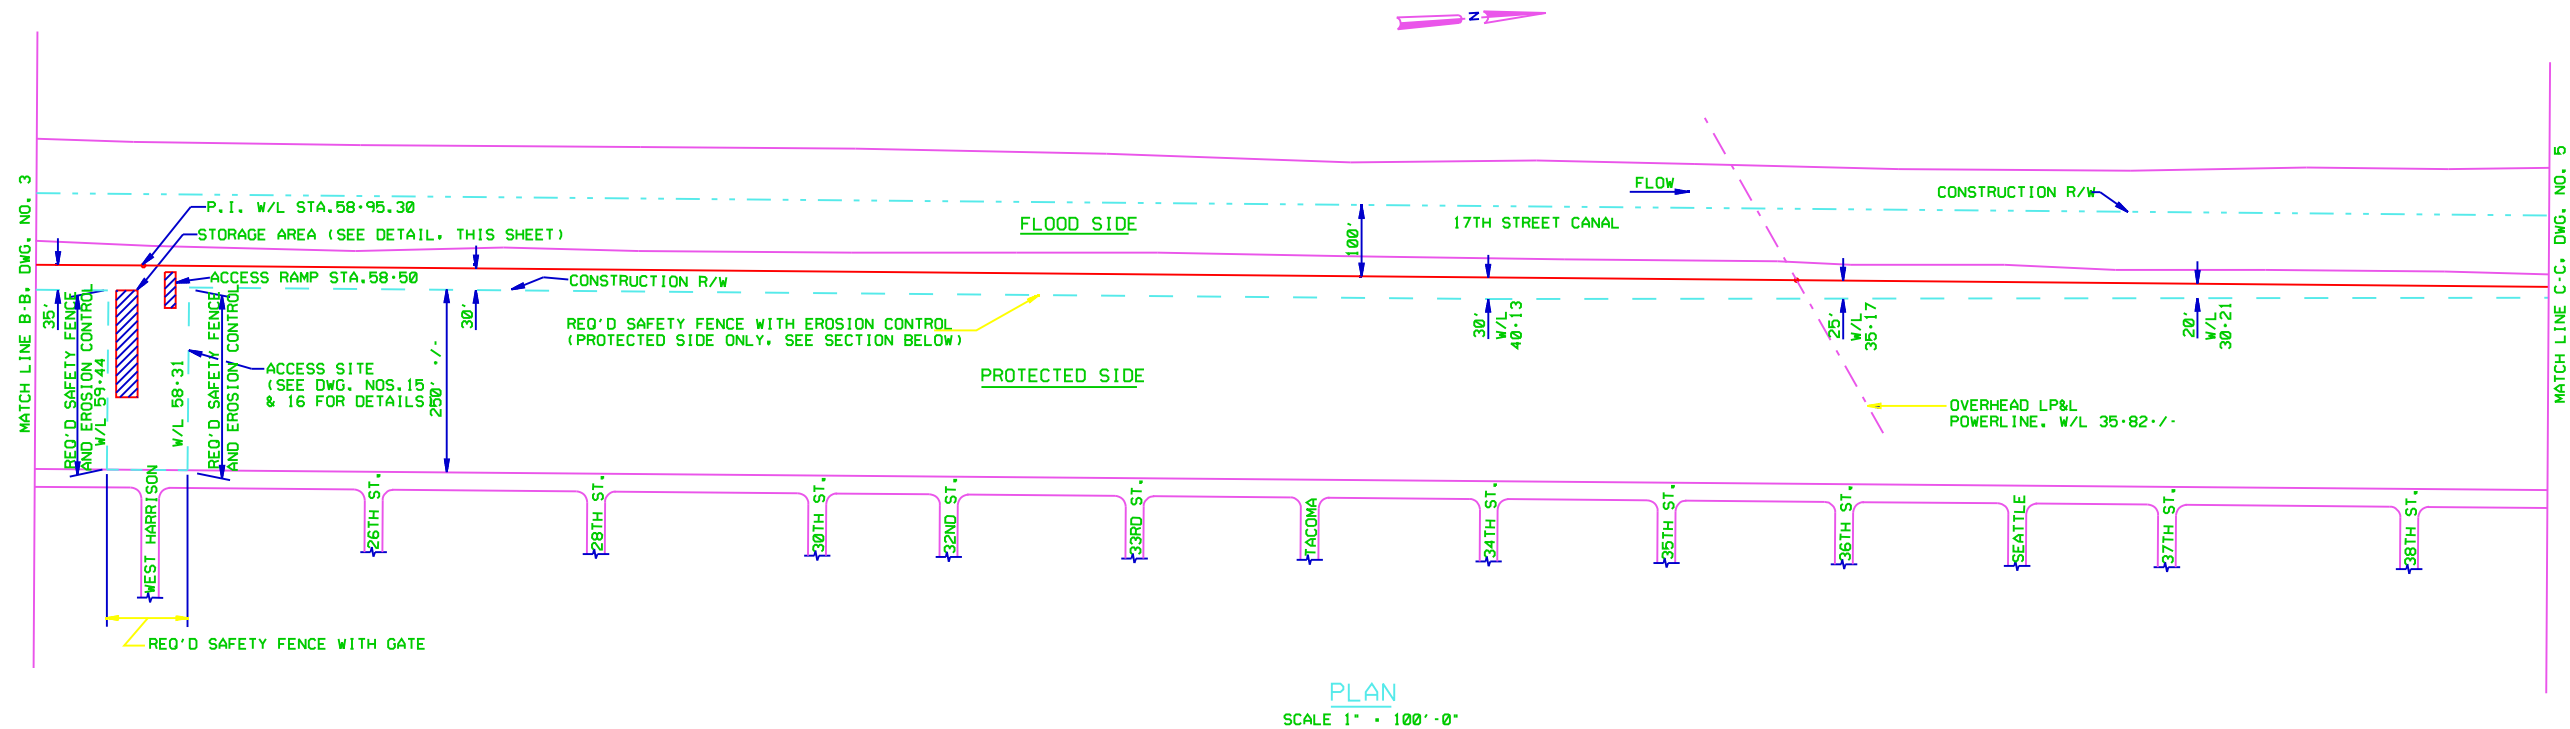

EXCAVATED MATERIAL NOT SPREAD ON LEVEE BACKSLOPE MUST BE HAULED IN ACCORDANCE WITH C2C OF THE SPECIFICATIONS AND STORED FOR REUSE IN ACCORDANCE WITH SPECIAL CLAUSE "OFFSITE STORAGE".

MATERIAL EXCAVATED FROM BELOW EL.2.0 IS TO BE HAULED IN ACCORDANCE WITH C2C-4.9.

STORAGE AREA STA.59+10 TO STA.59+40. (APPROX. 520 C.Y.) MATERIAL TO BE REUSED.

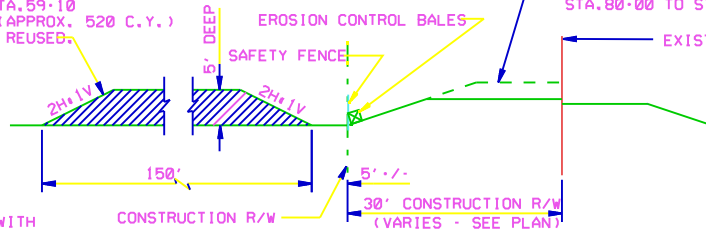

ACCESS RAMP AT STA.58+50 - SEE DWG. NO.16 FOR DETAILS.

STA.80+00 TO STA.69+93 SHOWN. OTHER AREAS SIMILAR.

ACCESS AND STORAGE DETAILS


STA.80+00 TO STA.40+13
SCALE 1" = 10'-0"
ACCESS NOT SHOWN FOR CLARITY

- LEGEND
- SHEET PILE TO BE CAPPED
 - SHEET PILE LEFT UNCAPPED
 - CONSTRUCTION R/W
 - UTILITY
 - CONSTR. R/W, SAFETY FENCE, EROSION CONTROL
 - CONSTR. R/W AND SAFETY FENCE

SCALE: 1" = 100'

SCALE: 1" = 10'



SYMBOL	DESCRIPTION	DATE	APPROVED
REVISIONS			
	U.S. ARMY ENGINEER DISTRICT, NEW ORLEANS CORPS OF ENGINEERS NEW ORLEANS, LOUISIANA		
BOARD OF LEVEE COMMISSIONERS ORLEANS LEVEE DISTRICT NEW ORLEANS, LOUISIANA		MODJESKI & MASTERS INC. NEW ORLEANS, LOUISIANA	
LAKE PONTCHARTRAIN, LA. AND VICINITY HIGH LEVEL PLAN 17TH STREET CANAL EXCAVATION AND FLOODWALL PROTECTION CAPPING OF FLOODWALLS EAST SIDE LEVEE IMPROVEMENTS			
PLAN - 3			
DESIGNED BY: F.S. DRAWN BY: P.M.R. CHECKED BY: M.L.S.	DATE: NOV. 1992	PLOT SCALE: 1200	PLOT DATE: APR 1993
	CADD FILE: #820918.DGN	FILE NO. H-4-40208	
SUBMITTED BY: P. CONWAY MODJESKI & MASTERS INC.	SOLICITATION NO. DACW29-93-B-0025	DWG. 4	OF 16